

HITT GAINES, P.C.
Intellectual Property Law & Related Matters

FACSIMILE TRANSMISSION

TO: Examiner James Rutten/USPTO
FAX NO. 571-273-3703
FROM: Steven J. Hanke
RE: Application No. 10/612,097; Attorney Docket No. ECKHART 1-2-1-5
DATE: March 14, 2008
PAGES: 13 (including cover page)

If you do not receive the indicated number of pages, please notify the sender at the telephone number shown below. Thank you.

THE INFORMATION CONTAINED IN THIS FACSIMILE TRANSMISSION IS AN ATTORNEY-CLIENT PRIVILEGED, CONFIDENTIAL COMMUNICATION INTENDED FOR THE EXCLUSIVE USE OF THE INTENDED RECIPIENT NAMED ABOVE. IF YOU ARE NOT THE INTENDED RECIPIENT, OR ARE AN EMPLOYEE OR AGENT RESPONSIBLE FOR DELIVERING THIS TRANSMISSION TO THE INTENDED RECIPIENT, YOU ARE HEREBY NOTIFIED THAT ANY DISSEMINATION, DISTRIBUTION OR COPYING OF THIS TRANSMISSION IS STRICTLY PROHIBITED. IF YOU HAVE RECEIVED THIS TRANSMISSION IN ERROR, PLEASE NOTIFY THE SENDER IMMEDIATELY AT THE TELEPHONE NUMBER SHOWN BELOW AND MAIL THE ORIGINAL TRANSMISSION TO THE ADDRESS BELOW. WE WILL REIMBURSE YOU FOR ANY REASONABLE EXPENSE YOU MAY INCUR DOING SO. THANK YOU.

Mailing Address: P.O. Box 832570, Richardson, Texas 75083-2570
Street Address: Palisades Central II, 2435 North Central Expressway, Suite 1300, Richardson, Texas 75080-2753 U.S.A.
Tel: (972) 480-8800 Fax: (972) 480-8865 firm@hittgaines.com

ATTORNEY DOCKET NO. ECKHART 1-2-1-5**PATENT****IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**Applicant: Jason Eckhart, *et al.*

Serial No.: 10/612,097

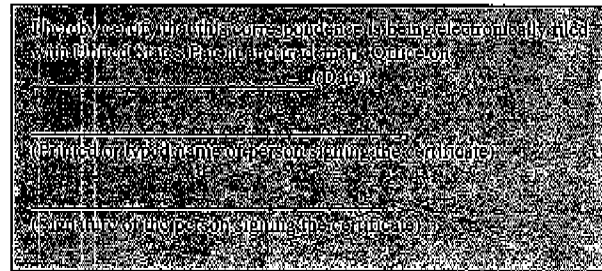
Filed: July 2, 2003

Title: A CONDITION MANAGEMENT SYSTEM AND
METHOD OF OPERATION THEREOF

Grp./A.U.: 2192

Examiner: James D. Rutten

Confirmation No.: 3424

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

PROPOSED AMENDMENT

Please find below a proposed amendment to the claims based on the telephonic interview with the Examiner on March 13, 2008.

Appl. No. 10/612,097
Reply to Examiner's Action dated 12/31/2007

Proposal only
Do NOT Enter

/jdr/ 3/17/08

IN THE CLAIMS:

1. (Currently Amended) A condition management system embodied in a computer-readable media of a processor employing a hierarchical register consolidation structure, comprising:

a condition management data structure, separate from said hierarchical register consolidation structure, configured to abstract groups of status indicators associated with said hierarchical register consolidation structure into a tree of hierarchical container objects and element objects, each of said container objects associated with at least one of said element objects and linked to a single parent object, each of said element objects configured to represent at least one of said status indicators and linked to a single child object, wherein if two groups of said status indicators consolidate to a single consolidation status indicator of said hierarchical register consolidation structure, one of said container objects being associated with said at least one of said element objects is a virtual element object, said virtual element object being said parent object to one of said container objects associated with said element objects representing said status indicators of one of said two groups;

an abstraction retrieval subsystem configured to employ said condition management structure to traverse said hierarchical register consolidation structure to determine a condition of at least one of said status indicators; and

an abstraction management subsystem configured to employ said condition management structure to control a propagation of selected ones of said status indicators through said hierarchical register consolidation structure.

Appl. No. 10/612,097

Reply to Examiner's Action dated 12/31/2007

2. (Original) The condition management system as recited in Claim 1 wherein each of said container objects includes said at least one of said element objects.

3. (Previously Presented) The condition management system as recited in Claim 1 wherein said condition management structure is dynamically allocated within the hardware associated with said processor.

4. (Original) The condition management system as recited in Claim 1 wherein said condition management structure is pre-allocated within the hardware associated with said processor.

5. (Original) The condition management system as recited in Claim 1 wherein said status indicators are bits of registers within said hierarchical register consolidation structure.

6. (Original) The condition management system as recited in Claim 1 wherein said hierarchical register consolidation structure is a hierarchical interrupt register structure of said processor.

7. (Original) The condition management system as recited in Claim 6 wherein each of said status indicators represents an interrupt bit in an interrupt register of said hierarchical interrupt register structure.

Appl. No. 10/612,097

Reply to Examiner's Action dated 12/31/2007

8. (Original) The condition management system as recited in Claim 7 wherein said abstraction management subsystem is further configured to set/clear or enable/disable interrupts for said interrupt bit.

9. (Original) The condition management system as recited in Claim 1 wherein said parent object is a consolidation element object associated with a hierarchically higher container object and said child object is a hierarchically lower container object.

10. (Original) The condition management system as recited in Claim 9 wherein said consolidation element object represents the consolidation of all of said element objects associated with said child object.

11. (Original) The condition management system as recited in Claim 1 wherein said abstraction management subsystem is further configured to set/clear said status indicators or maintain associated parameters for one or more of said status indicators.

12. (Original) The condition management system as recited in Claim 1 wherein said abstraction management subsystem is further configured to create or destroy said condition management structure.

13. (Original) The condition management system as recited in Claim 1 wherein said container objects include addresses to registers of said hierarchical register consolidation structure,

Appl. No. 10/612,097
Reply to Examiner's Action dated 12/31/2007

said abstraction retrieval subsystem and said abstraction management subsystem further configured to employ said addresses in accessing said hierarchical register consolidation structure.

14. (Original) The condition management system as recited in Claim 1 wherein said abstraction retrieval subsystem is further configured to employ a mask to determine said condition of said at least one of said status indicators represented by ones of said element objects associated with a leaf container object.

15. (Currently Amended) A method of operating a condition management system for use with a processor employing a hierarchical register consolidation structure, comprising:

employing a condition management data structure, separate from said hierarchical register consolidation, to abstract groups of status indicators associated with said hierarchical register consolidation structure into a tree of hierarchical container objects and element objects, each of said container objects associated with at least one of said element objects and linked to a single parent object, each of said element objects configured to represent at least one of said status indicators and linked to a single child object, wherein if two groups of said status indicators consolidate to a single consolidation status indicator of said hierarchical register consolidation structure, one of said container objects being associated with said at least one of said element objects is a virtual element object, said virtual element object being said parent object to one of said container objects associated with said element objects representing said status indicators of one of said two groups;

employing said condition management structure to traverse said hierarchical register consolidation structure to determine a condition of at least one of said status indicators; and

Appl. No. 10/612,097

Reply to Examiner's Action dated 12/31/2007

employing said condition management structure to control a propagation of selected ones of said status indicators through said hierarchical register consolidation structure.

16. (Original) The method as recited in Claim 15 wherein each of said container objects includes said at least one of said element objects.

17. (Previously Presented) The method as recited in Claim 15 further comprising dynamically allocating said condition management structure within the hardware associated with said processor.

18. (Original) The method as recited in Claim 15 further comprising pre-allocating said condition management structure within the hardware associated with said processor.

19. (Original) The method as recited in Claim 15 wherein said status indicators are bits of registers within said hierarchical register consolidation structure.

20. (Previously Presented) The method as recited in Claim 15 wherein said hierarchical register consolidation structure is a hierarchical interrupt register structure of said processor.

21. (Original) The method as recited in Claim 20 wherein each of said status indicators represents an interrupt bit in an interrupt register of said hierarchical interrupt register structure.

22. (Original) The method as recited in Claim 21 further comprising setting/clearing or

Appl. No. 10/612,097
Reply to Examiner's Action dated 12/31/2007

enabling/disabling interrupts for said interrupt bit.

23. (Original) The method as recited in Claim 15 wherein said parent object is a consolidation element object associated with a hierarchically higher container object and said child object is a hierarchically lower container object.

24. (Original) The method as recited in Claim 23 wherein said consolidation element object represents the consolidation of all of said element objects associated with said child object.

25. (Original) The method as recited in Claim 15 further comprising setting/clearing said status indicators or maintaining parameters for one or more of said status indicators.

26. (Original) The method as recited in Claim 15 further comprising creating or destroying said condition management structure.

27. (Original) The method as recited in Claim 15 wherein said container objects include addresses to registers of said hierarchical register consolidation structure, said method further comprising employing said addresses in accessing said hierarchical register consolidation structure.

28. (Original) The method as recited in Claim 15 wherein said employing said condition management structure to traverse includes employing a mask to determine said condition of said at least one of said status indicators represented by ones of said element objects associated with a leaf

Appl. No. 10/612,097
Reply to Examiner's Action dated 12/31/2007

container object.

29. (Currently Amended) A memory for storing status indicators to control a propagation of selected ones of said status indicators through a hierarchical register consolidation structure, comprising:

a condition management data structure stored in said memory, separate from said hierarchical register consolidation structure, said condition management data structure including information to abstract groups of status indicators associated with a hierarchical register consolidation structure of said processor into a tree and accessed by said application program, said condition management data structure including:

hierarchical container objects and element objects stored in said memory, each of said container objects being associated with at least one of said element objects and having a parent link to a single parent object, wherein if two groups of said status indicator consolidate to a single consolidation status indicator of said hierarchical register consolidation structure, one of said container objects being associated with said at least one of said element objects is a virtual element object, said virtual element object being said parent object to one of said container objects associated with said element objects representing said status indicators of one of said two groups;

each of said element objects representing at least one of said status indicators and having a child link to a single child object; and

said parent object being a consolidation element object associated with a hierarchically higher container object and said child object being a hierarchically lower container object, thereby establishing a hierarchy of said container objects.

Appl. No. 10/612,097
Reply to Examiner's Action dated 12/31/2007

30. (Canceled)

31. (Original) The memory as recited in Claim 29 wherein a single one of said element objects being said parent object to one of said container objects associated with said element objects representing a group of said status indicators if said group of said status indicators consolidate to a plurality of consolidation status indicators of said hierarchical register consolidation structure, remaining ones of said plurality of said consolidation status indicators not being represented in said condition management data structure.

32. (Original) The memory as recited in Claim 29 wherein a first portion of one group of said status indicators being represented by a first set of said element objects associated with one of said container objects and a second portion of said one group of said status indicators being represented by a second set of said element objects associated with a virtual container object if said first and second portions of said one group of said status indicators consolidate to different consolidation status indicators of said hierarchical register consolidation structure, said virtual container object having a virtual parent link to a different parent object than said parent link of said one of said container objects.

33. (Original) The memory as recited in Claim 29 wherein each of said container objects includes said at least one of said element objects.

Appl. No. 10/612,097

Reply to Examiner's Action dated 12/31/2007

34. (Original) The memory as recited in Claim 29 wherein only one of said container objects is a root container object, said root container object being associated with a hierarchically highest group of said status indicators of said hierarchical register consolidation structure and being a starting point for accessing said condition management data structure, said root container object further having said parent link to said parent object being unestablished.

35. (Original) The memory as recited in Claim 34 wherein ones of said container objects are leaf container objects, each of said leaf container objects being associated with a hierarchically lowest group of said status indicators, each of said elements objects associated with said leaf container objects having said child link to said child object being unestablished.

36. (Original) The memory as recited in Claim 29 wherein each of said element objects include a container link to its associated one of said container objects.

37. (Original) The memory as recited in Claim 29 wherein each of said element objects include a unique name and a position of said at least one of said status indicators within a register of said hierarchical register consolidation structure that is associated with said at least one of said status indicators.

38. (Original) The memory as recited in Claim 29 wherein each of said container objects include an address of a register of said hierarchical register consolidation structure selected from the group consisting of:

Appl. No. 10/612,097
Reply to Examiner's Action dated 12/31/2007

a status register address;

a mask register address;

a persistency register address; and

an alarm register address.

39. (Original) The memory as recited in Claim 29 wherein said status indicators are bits of registers within said hierarchical register consolidation structure.

40. (Original) The memory as recited in Claim 29 wherein said hierarchical register consolidation structure is a hierarchical interrupt register structure of said processor.

41. (Original) The memory as recited in Claim 40 wherein each of said status indicators represents an interrupt bit in an interrupt register of said hierarchical interrupt register structure.

42. (Original) The memory as recited in Claim 29 wherein said consolidation element object represents the consolidation of all of said element objects associated with said child object.

Appl. No. 10/612,097

Reply to Examiner's Action dated 12/31/2007

The Applicants request the Examiner to telephone the undersigned attorney of record at (972) 480-8800 if such would further or expedite the prosecution of the present application.

Respectfully submitted,

HITT GAINES, PC

Steven J. Hanke
Registration No. 58,076

Dated: March 14, 2008

P.O. Box 832570
Richardson, Texas 75083
(972) 480-8800